

# PS1200


NEW PRODUCT  
ANNOUNCEMENT

InfoSealPS



The PS1200 is a combination of Pressure Sealing with the added advantage of document inserting and perimeter sealing which protects the inserted document. A variety of inserts can be processed including reply envelopes, customer information or advertisements. These are placed in up to 2 feed stations and inserted at the point of fold with the pressure seal document.


Cycling at a maximum 10,000 filled forms per hour, the AS1200 is designed not only to reduce costs but also to guarantee fast and efficient mail processing, total product security and confidentiality. Designed with a 30 job program memory, the PS1200 is flexible and easy to use, offering a cost-effective solution to a wide range of mailing tasks. It is fitted with extractable, mobile paper hoppers, which can be easily changed or re-loaded in a matter of seconds.

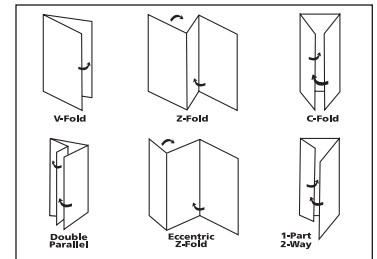

## Technical Specification

Processing speed	Sealing Only 12,000 forms per hour – Inserting 10,000 forms per hour
Monthly Duty Cycle	500,000
Feeder capacity	4,000 sheets
Form size	Width: 4-1/4" - 9-1/2" x Depth: 7" - 16"
Insert size	Width: 4" - 7-1/2" x Depth: 2-1/2" - 4"
Fold configurations	V, C, Z, Eccentric Z, Double Parallel and 1-Part 2-Way
Paper weights	Min. 24# - Max. 100# Tag
Form Security	Double document detection
Sealer	Full Perimeter Seal
Color	Light Gray
Size	L 76" x W 26" x H 42" - L with hi-cap feeder 97"
Weight	574 lbs.
Warranty	90 Days
Compliance	CE Certified
Options & Accessories	High Capacity Sheet Feeder (Over 4,000 forms) Guillotines & Bursters - For continuous in-line processing Directional Out-Feed Conveyor

# PS1200

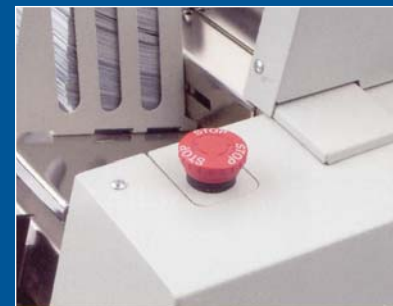

Emergency stop button for operator safety.



Single form processing to assist the operator and avoid loss of any documents.

## Pressure Sealing and Document Inserting



The PS1200 is a combination of Pressure Sealing with the added advantage of document inserting and perimeter sealing which protects the inserted document. A variety of inserts can be processed including reply envelopes, customer information or advertisements. These are placed in up to 2 feed stations and inserted at the point of fold with the pressure seal document.

Documents to be inserted are placed in the feed stations and can be continually loaded while processing.



Perimeter sealing which protects the content and the form.



### It's so easy!

The large LCD display guides you through operating the machine - quickly and simply

```
* Main Menu *
[Job Settings]
Save Settings
Select Job ↓
```

The main screen displays the current status of the machine

```
Prog: PHYROLL 11 #
Count: 001117
Nest:OFF Speed:09
Status: Ready
```

Then simply choose a job from the list, and you're ready to go!

```
* ERROR 1 * L?
Feed Station 1
appears to be empty
```

If the machine stops, the display will show you why - and what to do next.



Easy access for setting perimeter seal to the form size.